




JP Concrete

DESIGN | SUPPLY | INSTALL

CONCRETE HOARDING BLOCKS

www.jpconcrete.co.uk

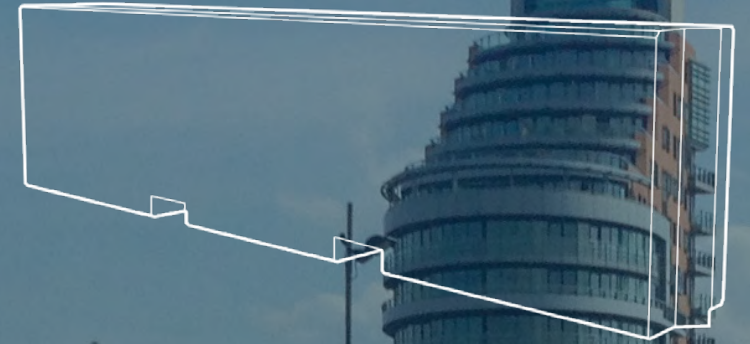

Expert advice

Our product specialists will advise on the most cost-effective precast solution for your project.



Quality Assured

We are proud to hold ISO: 9001, 14001 & 18001 Constructionline Silver Membership &SSIP



Precast solutions

Our skilled teams of engineers, groundworkers & precast installers cover the entire project life-cycle.

CONCRETE HOARDING BLOCKS

Precast concrete hoarding blocks are available in a range of sizes to enable you to safely and quickly erect site hoarding of all types.



- ✓ Fast & Safe to Install
- ✓ No Groundwork Required
- ✓ Range of Sizes & Weights
- ✓ Available for Hire & Purchase
- ✓ Installation Service Available

Features

Fast turnaround on orders from stock, nationwide delivery and off-load service.

Perfect for situations where groundwork is not possible and a non-invasive solution is required.

Compatible with traditional timber hoarding, steel panels and more environmentally friendly, reusable PVC hoarding panels.

The precast hoarding blocks are suitable for a wide range of applications including:

- Construction Hoarding
- Site Security
- Access Management
- Vehicle / Pedestrian Segregation

If you require any further details please contact us and one of our product experts will be happy to provide more information. Call the team today to discuss your project.
01158 220 282

PRODUCT SPECIFICATIONS

Below is a table outlining the characteristics of the concrete hoarding blocks.



Here you can find information such as concrete strength & lifting detail.

If you require any further details please contact us and one of our product experts will be happy to provide more information.

850kg & 1000kg product specifications

Concrete Strength	C40	Connection		Edge Detail		Concrete Finish	A
Compressive strength of concrete after 28 days of curing.		Precast blocks can be joined together with scaffolding poles.		Chamfered edges create softer sight lines & reduce damage during installation.		Smooth mould finish Type A to precast element, defined in British Standards.	

3000mm product specifications

Concrete Strength	C40	Connection		Edge Detail		Concrete Finish	A
Compressive strength of concrete after 28 days of curing.		Precast elements interlock with tongue and groove edges.		Chamfered edges create softer sight lines & reduce damage during installation.		Smooth mould finish Type A to precast element, defined in British Standards.	

PRODUCT RANGE

We provide turn-key solutions for site security and hoarding, including structural design and installation.

The lifting points in the top of the hoarding blocks can be substituted for threaded sockets, so that steel brackets can be bolted to the hoarding blocks for vertical posts. Precast holes through the 850kg & 1000kg blocks allow scaffolding poles to be inserted to link multiple blocks together. The 1000kg blocks also have threaded sockets on one side to fix posts to. 3m hoarding blocks interlock and give a strong, secure base for hoarding.

850kg



Length **1200mm**

Width **500mm**

Height **600mm**

Weight **850kg**

1000kg



Length **750mm**

Width **750mm**

Height **750mm**

Weight **1000kg**

3000mm



Length **3000mm**

Width **450mm**

Height **800mm**

Weight **2500kg**



Get clarity

Visit our new website and get to grips with our precast products in detailed 3D



NOTTINGHAM

DEVON

SUSSEX

Get a FREE quotation or advice
Call **01158 220 282** or
email: **info@jpconcrete.co.uk**

Head Office

The Quay, Plymouth Road, Tavistock,
Devon PL19 8AB

Manufacturing

Staunton Works, Staunton in the Vale,
Nottingham NG13 9QB

Sales & Marketing

Newhaven Enterprise Centre, Newhaven,
East Sussex BN9 9BA